

40x40x28mm (1.57"x1.57"x1.10")





Frame:Plastic(UL:94-0)
 Impeller:Plastic(UL:94-0)
 Lead wire:UL 1007AWG24
 Red wire positive (+)
 Black Wire negative (-)
 Operation Temperature:-10°C-70°C
 Motor Protection: Impedance Protected
 Reverse Polarity Protected
 Safety approval: UL TUV CE

Specifications(Nominal)

S=Sleeve bearing B=One ball bearing D=Two ball bearing

Model No.	Bearing System Type	Rated Voltage (VDC)	Speed Type	Rated Current (A)	Rated Speed (RPM)	Air Flow (CFM)	Aire Pressure (mmAg)	Noise Level (dBA)	Weight (g)
HT□D04028	S/B/D	5	H	0.32	7000	9.20	6.00	32.0	35
			M	0.28	5500	6.70	4.00	27.0	
		12	H	0.25	10000	13.50	11.99	42.0	
			M	0.23	9000	12.13	9.77	39.0	
			L	0.20	7500	9.60	5.81	37.0	
		24	H	0.18	8800	11.20	8.10	39.0	
			M	0.14	8000	10.10	6.80	38.0	
			L	0.10	5000	6.10	3.70	27.0	

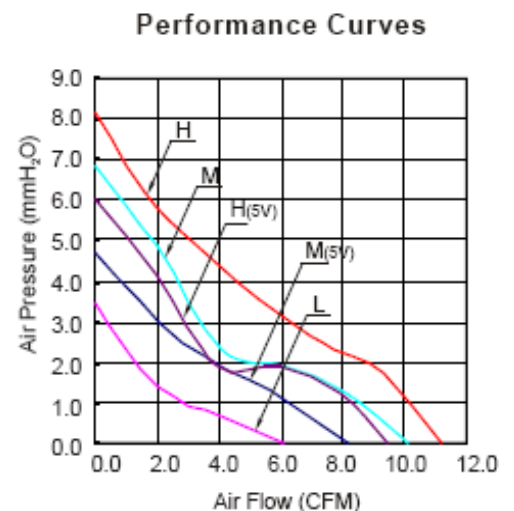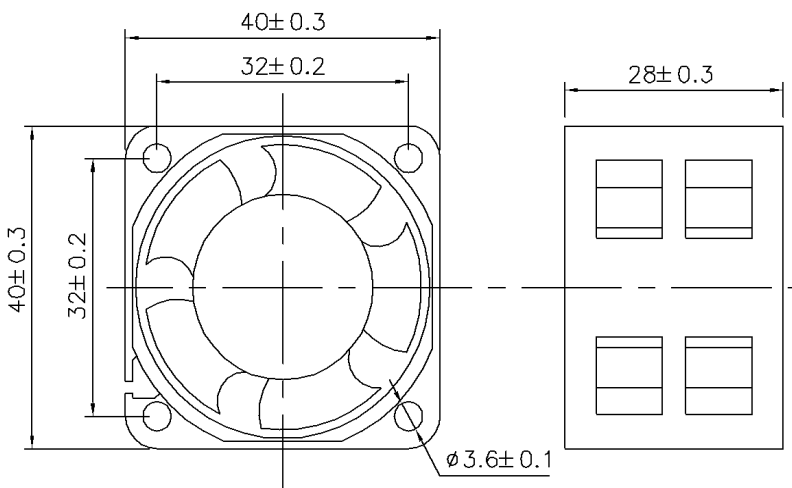

* All reading are typical values at rated voltage.
 * Specifications subjected to change without notice